


series 272

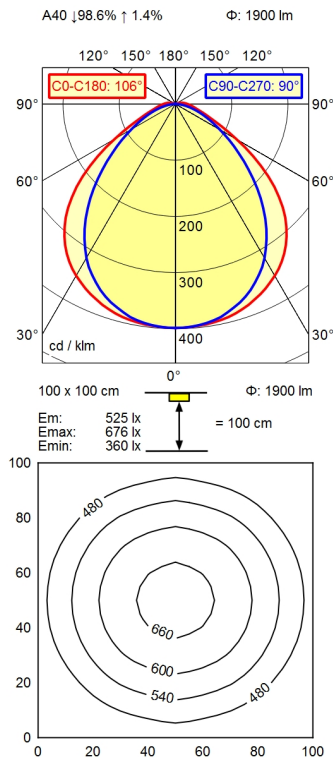

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
direct ratio
beam angle
colour temperature
colour temperatur
color rendering index (CRI)
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
weight (net)
mains lead
fastening
dimension
light output
side part
special features

LED
 without
 230V, 50/60Hz
 env. 24 W
 approx. 1.900 lm
 approx. 79 lm/W
 direct
 approx. 99 %
 100°
 neutral white
 approx. 5.000 K
 >= 80
 < 4 SDCM
 diffuser foil
 <= 18000 cd/m²
 <= 25
 IP 67
 I
 switchable
 external
 acrylic (PMMA), clear
 env. 1,5 kg
 connector; series 272
 pipe clamp (accessory)
 A=510 mm
 D=456 mm
 A with screwed cable gland
 light forming