


CEE 7/VII

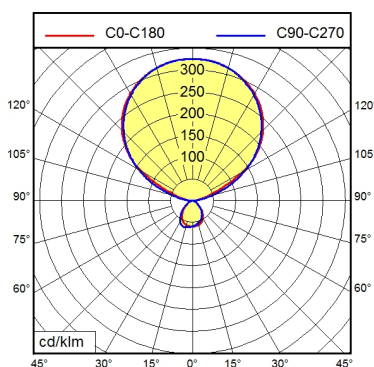

**light source**  
**work equipment**  
**connected load**  
**power consumption**  
**power factor**  
**luminous flux**  
**luminous efficiency**  
**light distribution**  
**direct ratio**  
**colour temperature**  
**colour temperatur**  
**color rendering index (CRI)**  
**chromaticity tolerance LED**  
**glare control**  
**luminance (L65)**  
**unified glare rating (4H 8H)**  
**system of protection**  
**class of protection**  
**technology**  
**operation**  
**housing**  
**cover**  
**arm**  
**luminaire base**  
**weight (net)**  
**mains lead**  
**fastening**  
**decorative contrast side parts**  
**life expectancy LED**  
**special features**

**LED**  
 electronic ballast  
 220-240V, 50/60Hz  
 env. 93 W  
 env. 0,943  
 approx. 14.050 lm  
 approx. 151 lm/W  
 direct/indirect  
 approx. 12 %  
 neutral white  
 approx. 4.000 K  
 >= 80  
 < 3 SDCM  
 conical prismatic screen  
 <= 3000 cd/m<sup>2</sup>  
 <= 10  
 IP 20  
 I  
 presence and daylight sensor control (PIR)  
 multi-function switch  
 steel/plastic; painted; black  
 Acrylic satine  
 steel tube; painted; tubular section upright; black  
 C-form flat  
 env. 19,7 kg  
 approx. 3,0 m; mains plug; CEE 7/VII  
 floor standing base  
 black  
 3  
 integrated light and presence sensor PIR;  
 separated, direct and indirect light individually  
 adjustable; retrofittable with TALK module; Flicker-  
 free; Cradle to Cradle Certified TM; Direct light  
 component with edge light and light-guide  
 technology for homogenous light exit; luminaire  
 head detachable